




AYZO

SECURING BUSINESS SECURING LIVES

2 CORE 100/40 HIGH FLEX CABLE

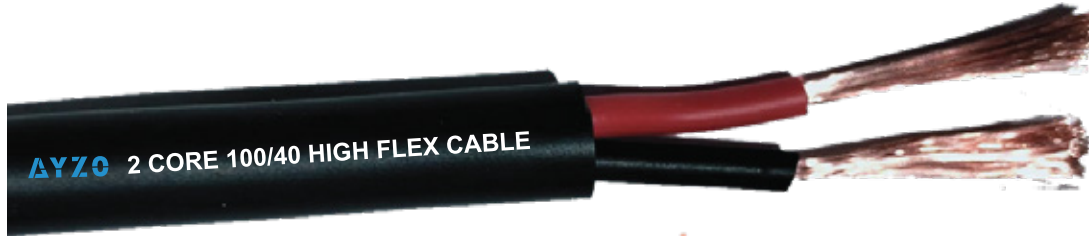

Type of Cable	2 Core High Flex Cable
Conductor	Annealed Bare Copper (Class 6 to IS 8130)
Size of conductor	100/0.12 mm
Max. Resistance at 20 °C	15.30 Ω /km at 20
Insulation	PVC (Type D to IS 5831)
Thickness Nom.	0.60 mm nominal, 0.44mm min.
Core Diameter Nom.	2.60 mm
Sheathing	PVC Type ST-3 to IS 5831
Thickness Nom./ Min.	0.90 mm / 0.67 mm
Over All Dia. Nom.	7.10 mm
Marking / Printing	AYZO CABLES 2 CORE x 1.5 SQMM SPEAKER CABLE
Voltage Rating	1100 V AC
Current Rating	12.0 amps (for guidance only as this will depend on the conditions of the installation)
Temperature Range	-5°C to +65°C
Packing (In meters)	90/100/300